




液晶表示素子(LCD)

LSSシリーズ(民生用通常温度範囲タイプ)

LSHシリーズ(産業用広温度範囲タイプ)

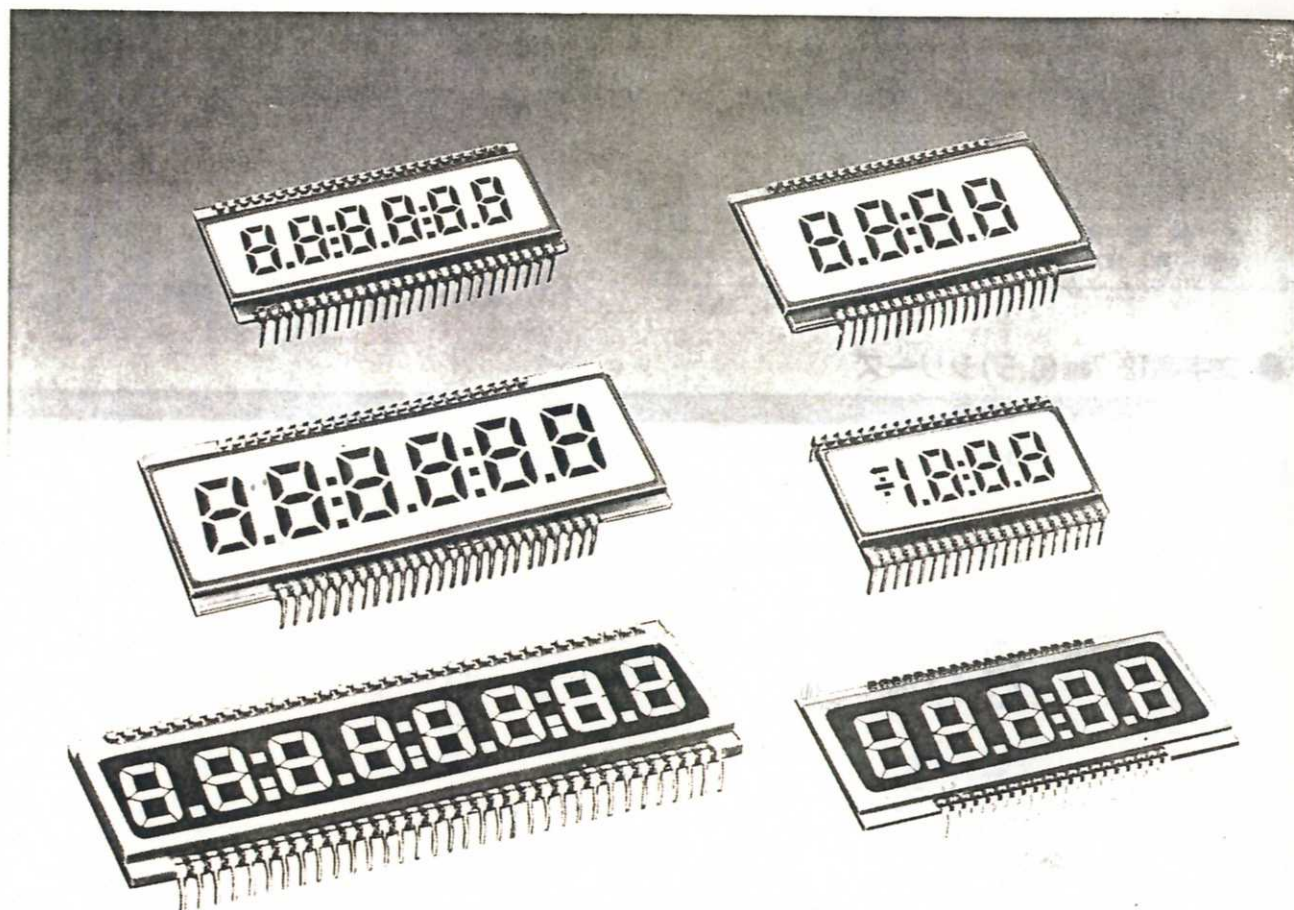

標準品LCD一覧表

型名	桁数	文字高 (mm)	ガラスサイズ (W×Hmm)	有効表示サイズ (W×Hmm)	コネク ピン数	推奨ドライバIC
LS□-3540-□P	4	8.89	50.8 × 22.9	45.72 × 12.7	40	(沖) MSM58292GS
LS□-5020-□P	2	12.7	30.5 × 30.5	24.15 × 16.51	18	(沖) MSM58292
LS□-5034-□P	3-½	12.7	50.8 × 30.5	45.72 × 16.51	40	(INTERSIL) ICM7224
LS□-5035-□P	3-½	12.7	50.8 × 30.5	45.72 × 16.51	40	(INTERSIL) ICL7106. ICL7116
LS□-5040-□P	4	12.7	50.8 × 30.5	44.45 × 16.51	40	(沖) MSM58292 (INTERSIL) ICM7211
LS□-5060-□P	6	12.7	69.85 × 30.5	63.5 × 16.51	50	(RCA) CD4055A
LS□-5080-□P	8	12.7	91.8 × 30.5	88.77 × 16.51	68	(HUGHES) HLCD0438A (INTERSIL) ICM7211(A)
LS□-7020-□P	2	17.78	38.1 × 38.1	31.75 × 24.38	18	(沖) MSM58292GS
LS□-7035-□P	3-½	17.78	69.85 × 38.10	63.5 × 24.38	40	(INTERSIL) ICL7106. ICL7116
LS□-7040-□P	4	17.78	69.85 × 38.10	63.5 × 24.38	40	(沖) MSM58292 (INTERSIL) ICM7211
LS□-7050-□P	5	17.78	81.28 × 38.10	76.2 × 25.4	40	(RCA) CD4055A
LS□-7060-□P	6	17.78	93.85 × 38.10	87.5 × 24.38	50	(RCA) CD4055A
LS□-10040-□P	4	2.54	93.85 × 45.72	88.77 × 33.02	40	(沖) MSM58292GS (INTERSIL) ICM7211
LS□-10060-□P	6	25.4	135.89 × 45.72	130.81 × 33.02	70	(RCA) CD4055A

